




45° Male Elbow: LMF

connects **fractional** tube to female NPT thread

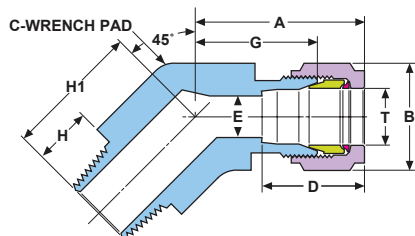


Part Number*	T P		Dimensions — inches							
	Tube O.D.	Pipe Thd.	A	B	C	D	E min.	G	H	H1
4LMF2[]	1/4	1/8	1.05	.56	.50	.64	.19	.72	.38	.78
4LMF4[]	1/4	1/4	1.11	.56	.63	.64	.19	.78	.56	1
6LMF2[]	3/8	1/8	1.19	.69	.63	.72	.19	.84	.38	.88
6LMF4[]	3/8	1/4	1.19	.69	.63	.72	.30	.84	.56	1
6LMF6[]	3/8	3/8	1.28	.69	.81	.72	.30	.94	.56	1.13
8LMF6[]	1/2	3/8	1.44	.88	.81	.97	.41	.97	.56	1.13
8LMF8[]	1/2	1/2	1.53	.88	.94	.97	.42	1.06	.75	1.38



45° Male Elbow, SAE, Positionable: LMFS

connects **fractional** tube to SAE straight thread boss

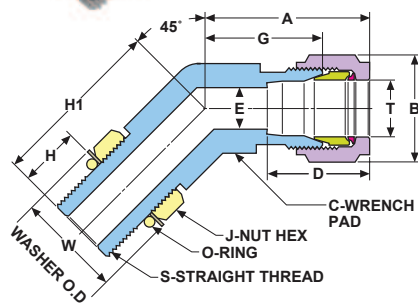

Part Number*	Dimensions — inches											O-ring Uniform Size #	
	T	S	A	B	C	D	E min.	G	H	H1	J Hex Flat		W
4LMFS4[]	1/4	7/16-20	1.05	9/16	1/2	.64	.19	.78	.39	1.05	9/16	.66	904
6LMFS6[]	3/8	9/16-18	1.19	11/16	5/8	.72	.30	.84	.44	1.14	11/16	.80	906
8LMFS8[]	1/2	3/4-16	1.44	7/8	13/16	.97	.42	.97	.50	1.30	7/8	1.02	908
12LMFS12[]	3/4	1 1/16-12	1.59	1 1/8	1 1/8	1	.66	1.16	.66	1.73	1 1/4	1.44	912
16LMFS16[]	1	1 5/16-12	1.88	1 7/8	1 3/8	1.31	.88	1.31	.66	1.86	1 1/2	1.73	916