




Union Tee Plus Adapter Assemblies Help Eliminate Costly Inventory

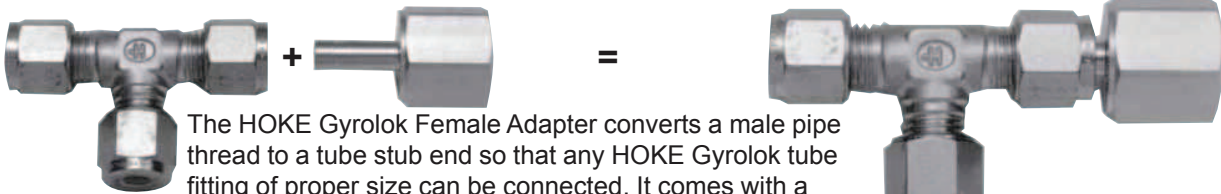

The HOKE Gyrolok Female Adapter converts a male pipe thread to a tube stub end so that any HOKE Gyrolok tube fitting of proper size can be connected. It comes with a female pipe thread on one end and a machined tube stub on the other. By using adapters with union tees, you'll need fewer male or female branch tees and run tees.



Fractional fitting shown

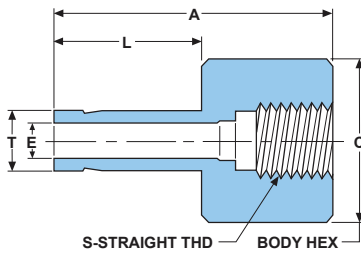

Female Adapter: AF/EZ

connects **fractional** port to male RG parallel threads (gauge)

Part Number*	T		S				Dimensions — inches		
	Tube O.D.	Thd. Size	A	Hex Flat	C	E min.	L		
4AF4[]EZ	1/4	1/4	1.42	3/4	.19	.69			
4AF8[]EZ	1/4	1/2	1.83	1 1/16	.19	.69			
8AF4[]EZ	1/2	1/4	1.53	3/4	.22	.97			
8AF8[]EZ	1/2	1/2	2	1 1/16	.28	.97			

Female Adapter: AF/MZ

connects **metric** port to male RG parallel threads (gauge)

Part Number*	T		S				Dimensions — mm		
	Tube O.D.	Straight Thd.	A	Hex Flat	C	E min.	L		
6AF4[]MZ	6	1/4	37.0	19.1	4.5	17.3			
6AF8[]MZ	6	1/2	46.3	27.0	4.5	17.3			
8AF4[]MZ	8	1/4	35.7	19.1	5.5	19.1			
8AF8[]MZ	8	1/2	47.2	27.0	6.4	19.1			
10AF4[]MZ	10	1/4	36.5	19.1	5.5	19.8			
10AF8[]MZ	10	1/2	47.4	30.2	7.0	19.8			
12AF4[]MZ	12	1/4	41.2	19.1	5.5	24.5			
12AF8[]MZ	12	1/2	46.7	27.0	7.0	24.5			
14AF8[]MZ	14	1/2	46.7	27.0	7.0	24.5			
16AF8[]MZ	16	1/2	49.5	27.0	7.0	27.3			
18AF8[]MZ	18	1/2	56.1	27.0	7.0	29.7			
22AF8[]MZ	22	1/2	57.9	27.0	7.0	29.7			
25AF8[]MZ	25	1/2	63.7	27.0	7.0	35.5			

RG female thread ends require a gasket inserted into the bottom of the port. The male end, when assembled, exerts pressure on the gasket, creating a seal.